




AIR NOZZLE SILVENT 220 F

Item number: 02200149270, 02200249270

SILVENT 220 F - 250 F: nozzle mounted on a bendable FlexBlow hose. Keeps desired position even at high pressure. Available in 4 different standard lengths. The FlexBlow hose has a 1/4" male connection thread. Same performance as 920 A.

Technical data

Replace open pipe Ø (mm)	6
Blowing force (N)	5.5
Air consumption (Nm ³ /h)	30
Sound level (dB(A))	81
Nozzle technology	Slot
Material (nozzle)	Zn
Connection	G 1/4"
Connection type	Male
Weight (g)	245
Max temp (°C)	70
Max op. pressure (MPa)	1.0

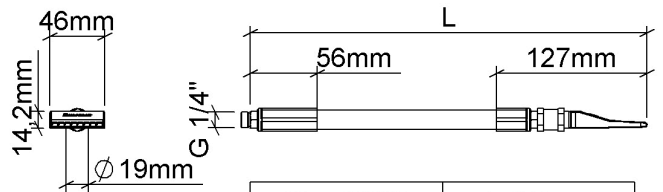

Silvent 220F	L=240mm
Silvent 230F	L=340mm
Silvent 240F	L=440mm
Silvent 250F	L=540mm

Benefits when replacing an open pipe

Replace open pipe Ø (mm)	6	
Noise reduction	21 [dB(A)]	77%
Energy savings	37 [Nm ³ /h]	55%

Material specification: Zn ZP0410 EN 1284, NBR 70, CW614N, Cu

Blowing properties at different pressures

Pressure (kPa)	200	400	600	800	1000
Blowing force (N)	2.0	4.3	7.0	9.2	11.4
Air consumption (Nm ³ /h)	12.0	25.0	38.0	50.1	62.0
Sound level (dB(A))	72.0	79.1	83.3	86.6	88.4

Blowing coverage (mm)

