




## AIR NOZZLE SILVENT 620

Item number: 06200039030, 06200339030

SILVENT 620 - 650: nozzle mounted on a bendable FlexBlow hose that keeps the desired position, even when blowing at high pressure. Available in 4 different standard lengths. The FlexBlow hose has a 1/8" male connection thread. Blowing force 2.9 N (10.2 oz).

### Technical data

|                                      |        |
|--------------------------------------|--------|
| Replace open pipe Ø (mm)             | 4      |
| Blowing force (N)                    | 2.9    |
| Air consumption (Nm <sup>3</sup> /h) | 16     |
| Sound level (dB(A))                  | 79     |
| Nozzle technology                    | Slot   |
| Material (nozzle)                    | Zn     |
| Connection                           | G 1/8" |
| Connection type                      | Male   |
| Weight (g)                           | 70     |
| Max temp (°C)                        | 70     |
| Max op. pressure (MPa)               | 1.0    |

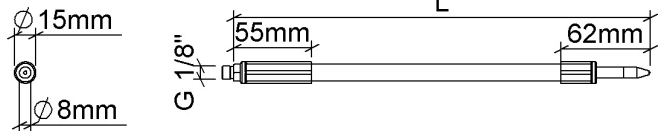

|             |         |
|-------------|---------|
| Silvent 620 | L=192mm |
| Silvent 630 | L=292mm |
| Silvent 640 | L=392mm |
| Silvent 650 | L=492mm |

### Benefits when replacing an open pipe

|                          |                         |     |
|--------------------------|-------------------------|-----|
| Replace open pipe Ø (mm) | 4                       |     |
| Noise reduction          | 16 [dB(A)]              | 67% |
| Energy savings           | 14 [Nm <sup>3</sup> /h] | 47% |

Material specification: Cu, NBR, CW614N

### Blowing properties at different pressures

| Pressure (kPa)                       | 200  | 400  | 600  | 800  | 1000 |
|--------------------------------------|------|------|------|------|------|
| Blowing force (N)                    | 1.1  | 2.3  | 3.7  | 4.8  | 6.0  |
| Air consumption (Nm <sup>3</sup> /h) | 6.5  | 12.5 | 20.1 | 27.1 | 34.1 |
| Sound level (dB(A))                  | 71.0 | 76.8 | 81.0 | 84.9 | 87.5 |

### Blowing coverage (mm)

