




## AIR NOZZLE SILVENT 650

Item number: 06500039030, 06500339030

SILVENT 620 - 650: nozzle mounted on a bendable FlexBlow hose that keeps the desired position, even when blowing at high pressure. Available in 4 different standard lengths. The FlexBlow hose has a 1/8" male connection thread. Blowing force 2.9 N (10.2 oz).

### Technical data

Replace open pipe Ø (mm)	4
Blowing force (N)	2.9
Air consumption (Nm <sup>3</sup> /h)	16
Sound level (dB(A))	79
Nozzle technology	Slot
Material (nozzle)	Zn
Connection	G 1/8"
Connection type	Male
Weight (g)	145
Max temp (°C)	70
Max op. pressure (MPa)	1.0

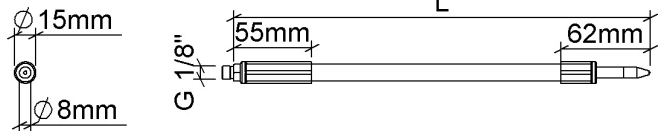

Silvent 620	L=192mm
Silvent 630	L=292mm
Silvent 640	L=392mm
Silvent 650	L=492mm

### Benefits when replacing an open pipe

Replace open pipe Ø (mm)	4	
Noise reduction	16 [dB(A)]	67%
Energy savings	14 [Nm <sup>3</sup> /h]	47%

Material specification: Cu, NBR, CW614N

### Blowing properties at different pressures

Pressure (kPa)	200	400	600	800	1000
Blowing force (N)	1.1	2.3	3.7	4.8	6.0
Air consumption (Nm <sup>3</sup> /h)	6.5	12.5	20.1	27.1	34.1
Sound level (dB(A))	71.0	76.8	81.0	84.9	87.5

### Blowing coverage (mm)

