



AIR NOZZLE SILVENT 715 CA

Item number: 07150169314, 07150269314

SILVENT 715 CA: adjustable variation of 715 C. Allows up to 30° blowing angle adjustment from the centerline. Time required for installation and fine tuning of the blowing angle is decreased considerably. Same performance as 715 C.

Technical data

Replace open pipe Ø (mm)	17
Blowing force (N)	45.0
Air consumption (Nm³/h)	311
Sound level (dB(A))	100
Nozzle technology	Slot
Material (nozzle)	1.4305 (303)
Connection	G 3/4"
Connection type	Female
Weight (g)	916
Max temp (°C)	400
Max op. pressure (MPa)	1.0

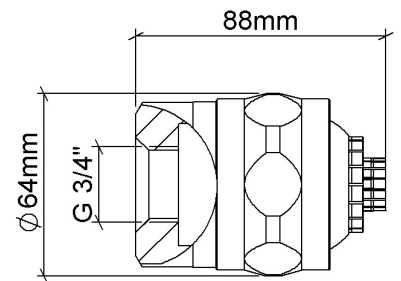

Benefits when replacing an open pipe

Replace open pipe Ø (mm)	17	
Noise reduction	23 [dB(A)]	80%
Energy savings	225 [Nm³/h]	42%

Material specification: EN 1.4305

Blowing properties at different pressures

Pressure (kPa)	200	400	600	800	1000
Blowing force (N)	18.1	35.7	53.3	71.2	88.9
Air consumption (Nm³/h)	142.8	257.0	364.0	476.4	587.2
Sound level (dB(A))	92.1	97.6	101.7	103.0	104.5

Blowing coverage (mm)

