



AIR NOZZLE SILVENT 512


Item number: 05120149243, 05120249243

- Slot nozzle (zinc)

SILVENT 512: slot nozzle that generates a directed air jet. Suitable for all-purpose blowing and blowing in confined spaces. Compact size makes this nozzle a popular choice for use in machines and tools where clearance is limited. Combines advantages of low noise level and low air consumption with high blowing force.

Technical data

Replace open pipe Ø (mm)	4
Blowing force (N)	3.2
Air consumption (Nm ³ /h)	19
Sound level (dB(A))	79
Nozzle technology	Slot
Material (nozzle)	Zn
Connection	G 1/8"
Connection type	Male
Weight (g)	5
Max temp (°C)	70
Max op. pressure (MPa)	1.0

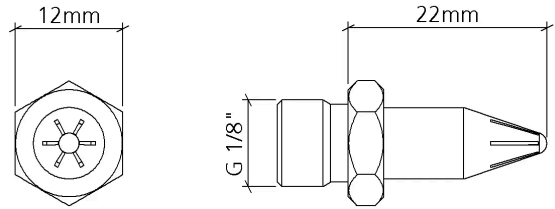

Benefits when replacing an open pipe

Replace open pipe Ø (mm)	4	
Noise reduction [dB(A)]	16 [dB(A)]	67%
Energy savings	11 [Nm ³ /h]	37%

Material specification: EN 1.4305, Zn ZP0410

Technical specifications

See basic information about the technical data. [Read more](#)

Blowing properties at different pressures

Pressure (kPa)	200	400	600	800	1000
Blowing force (N)	1.4	2.6	4.0	5.1	6.3
Air consumption (Nm ³ /h)	9.3	15.3	22.8	29.8	36.8
Sound level (dB(A))	71.0	76.8	81.0	84.9	87.5

Blowing coverage (mm)

