




AIR NOZZLE SILVENT 703 A

Item number: 07030129002, 07030229002

SILVENT 703 A: adjustable variation of 703. Allows up to 30° blowing angle adjustment from the centerline. Time required for installation and fine tuning of the blowing angle is decreased considerably. Same performance as 703.

Technical data

Replace open pipe Ø (mm)	7
Blowing force (N)	9.6
Air consumption (Nm³/h)	57
Sound level (dB(A))	89
Nozzle technology	Slot
Material (nozzle)	1.4305 (303)
Connection	G 1/2"
Connection type	Female
Weight (g)	430
Max temp (°C)	400
Max op. pressure (MPa)	1.0

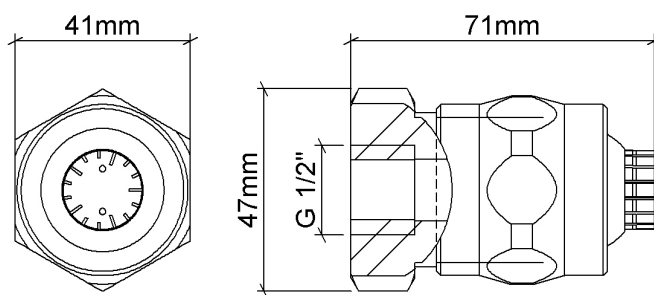

Benefits when replacing an open pipe

Benefits when replacing an open pipe		
Replace open pipe Ø (mm)	7	
Noise reduction	16 [dB(A)]	67%
Energy savings	35 [Nm³/h]	38%

Material specification: EN 1.4305

Blowing properties at different pressures

Pressure (kPa)	200	400	600	800	1000
Blowing force (N)	4.1	7.8	11.8	15.3	19.1
Air consumption (Nm³/h)	29.8	49.5	71.5	90.2	106.1
Sound level (dB(A))	83.0	87.0	90.8	93.0	94.6

Blowing coverage (mm)

