





## AIR NOZZLE SILVENT 720 A

Item number: 07200129004, 07200229004

SILVENT 720 A: an adjustable variation of 720. Adjustable blowing angle allows up to 30° adjustment from the centerline. The time required for installation and fine tuning of the blowing angle is decreased considerably as no fixed pipes need to be moved for adjustment. Adjustment of the blowing angle is often necessary in machines where the same manufacturing process is used to produce different parts. Otherwise, the same performance as 720.

### Technical data

Replace open pipe Ø (mm)	20
Blowing force (N)	68.0
Air consumption (Nm <sup>3</sup> /h)	420
Sound level (dB(A))	104
Nozzle technology	Slot
Material (nozzle)	1.4305 (303)
Connection	G 1"
Connection type	Female
Weight (g)	2280
Max temp (°C)	400
Max op. pressure (MPa)	1.0

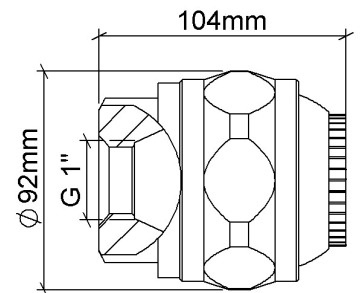

### Benefits when replacing an open pipe

Replace open pipe Ø (mm)	20	
Noise reduction	22 [dB(A)]	78%
Energy savings	320 [Nm <sup>3</sup> /h]	43%

Material specification: EN 1.4305

### Blowing properties at different pressures

Pressure (kPa)	200	400	600	800	1000
Blowing force (N)	20.0	51.7	82.9	114.1	145.4
Air consumption (Nm <sup>3</sup> /h)	182.6	343.5	500.0	650.1	804.1
Sound level (dB(A))	96.1	101.2	105.0	107.3	109.8

### Blowing coverage (mm)

