





## AIR NOZZLE SILVENT 705 LA

Item number: 07050169309, 07050269309

SILVENT 705 LA: adjustable variation of 705 L. Allows up to 30° blowing angle adjustment from the centerline. Time required for installation and fine tuning of the blowing angle is decreased considerably. Same performance as 705 L.

### Technical data

Replace open pipe Ø (mm)	10
Blowing force (N)	17.0
Air consumption (Nm <sup>3</sup> /h)	95
Sound level (dB(A))	93
Nozzle technology	Laval
Material (nozzle)	1.4305 (303)
Connection	G 1/2"
Connection type	Female
Weight (g)	483
Max temp (°C)	400
Max op. pressure (MPa)	1.0

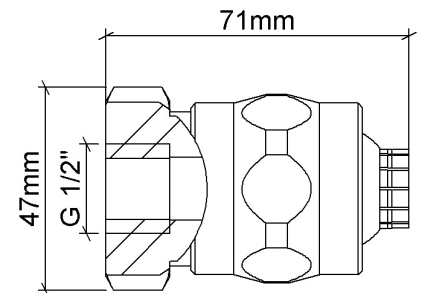

### Benefits when replacing an open pipe

Replace open pipe Ø (mm)	10	
Noise reduction	19 [dB(A)]	73%
Energy savings	90 [Nm <sup>3</sup> /h]	49%

Material specification: EN 1.4305

### Blowing properties at different pressures

Pressure (kPa)	200	400	600	800	1000
Blowing force (N)	6.5	13.1	20.2	27.1	33.9
Air consumption (Nm <sup>3</sup> /h)	43.1	78.0	111.2	145.8	181.1
Sound level (dB(A))	86.0	91.2	94.0	96.1	97.6

### Blowing coverage (mm)

